



Euro Tugs have proven their versatility and robustness at sea, over the years. The maximum free deck space for this type of multipurpose tugboat offers many possibilities for all kinds of operations including towing, anchor handling, dredging support and wind farm support.










CLASSIFICATION	Bureau Veritas I ₩ HULL • MACH • AUT-UMS, TUG, Unrestricted Navigation, GMDSS Area A3 Ice-class 1B
DIMENSIONS	
LENGTH O.A.	28,80 meters
BREADTH MLD.	10,00 meters
DEPTH AT SIDE	3,45 meters
DRAFT	2,60 meters
GROSS TONNAGE	249,9
NET TONNAGE	74,4
PERFORMANCES	
SPEED	10 knots
BOLLARD PULL	40 tons
PROPULSION	
MAIN ENGINES	2x Caterpillar 3512
TOTAL POWER	2388 kW at 1600 RPM
PROPELLERS	2200 mm in nozzle
AUXILIARIES	
GENERATOR SETS	2x Caterpillar C9
TOTAL E-POWER	400 kW
HYDRAULIC POWER PACK	2x 90 kW
BOW THRUSTER	200 kW tunnel (electric)

TANKS		
FUEL OIL	125 m <sup>3</sup>	
FRESH WATER	30 m <sup>3</sup>	
DECK LAY-OUT		
ANCHOR HANDLING / TOWING WINCH	Waterfall winch type	
ANCHOR HANDLING	120 ton holding force	
PULLING FORCE	100 ton at 1 <sup>st</sup> layer	
HAULING SPEED	6,5m/min - 18m/min	
TOWING WINCH	100 ton holding force	
PULLING FORCE	50 ton at 1 <sup>st</sup> layer	
HAULING SPEED	10m/min - 27m/min	
DECK CRANE	Heila HLRM 170-4S	
DECK	Azobé deck covering	
TOWING HOOK	Mampaey 65 tons SWL Disc	
FENDERING	Tire- and D-fendering on the side, pushbow fendering fore ship, D-fendering aft ship	
TUGGER WINCH	15 ton at 1 <sup>st</sup> layer	
TOWING PINS	Aft ship set + chain stopper	
ACCOMMODATION		
FACILITIES	Airconditioned accommodation for up to 10 crew members	

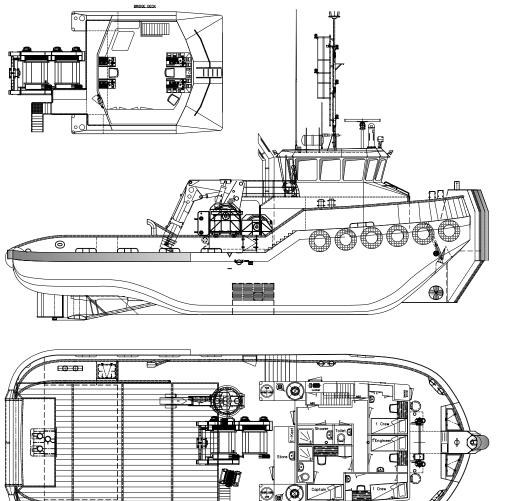

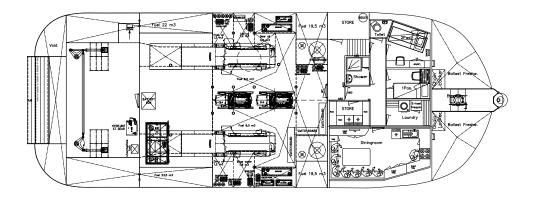



## EuroTug 2810 | Beluga Bremen

00

For more information, please contact us on: T +31 (0)184 621 423 E info@neptunemarine.com W www.neptunemarine.com Version: V.01

